

Constructing a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics, part 2

Gary D. Hart

Division of Natural Sciences
University of Pittsburgh at Greensburg

ICAM Applied Mathematics Conference
February 20, 2010

Application of Rigid Multi Body Dynamics

- RMBD in diverse areas
 - ★ rock dynamics
 - ★ robotic simulations
 - ★ virtual reality
 - ★ human motion
 - ★ nuclear reactors
 - ★ haptics
- VR or Virtual reality exposure (VRE) therapy
 - ★ fear of heights
 - ★ telerehabilitation
 - ★ fear of public speaking
 - ★ PTSD



Trivial Simulation

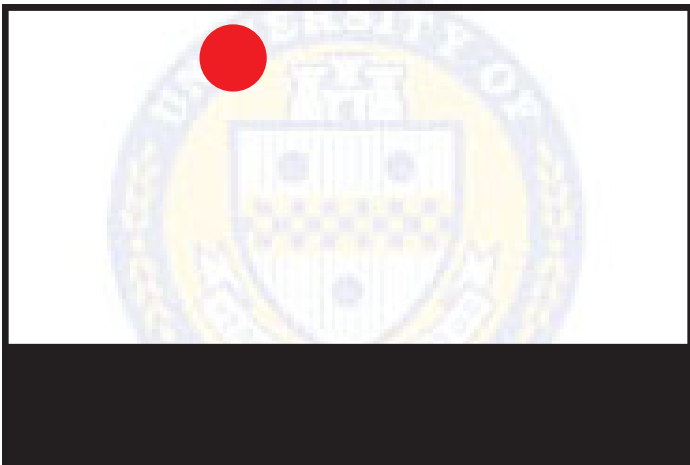


Figure: Simple Simulation: Trivial Example

Trivial Simulation

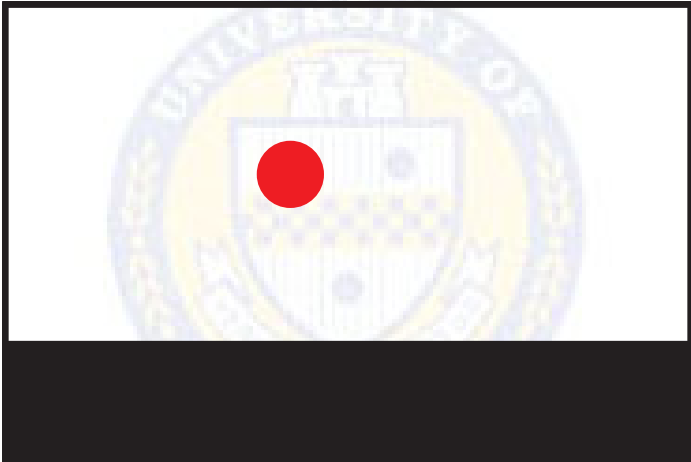


Figure: Simple Simulation: Trivial Example

Trivial Simulation

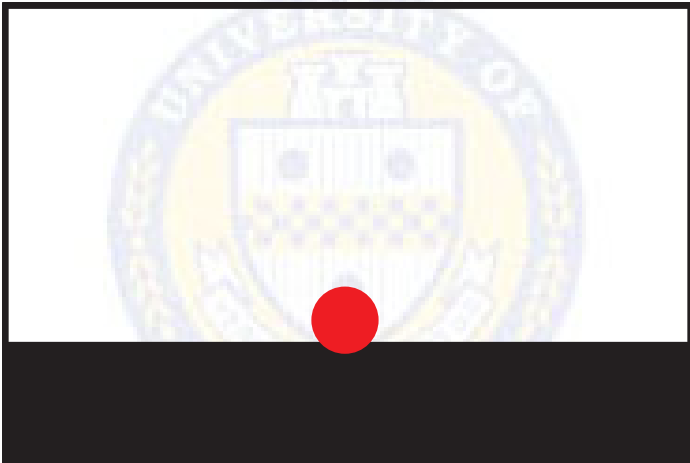


Figure: Simple Simulation: Trivial Example

Trivial Simulation

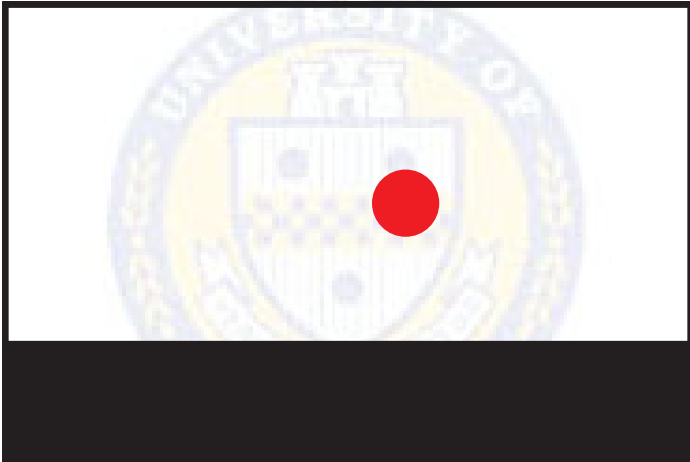


Figure: Simple Simulation: Trivial Example

Trivial Simulation

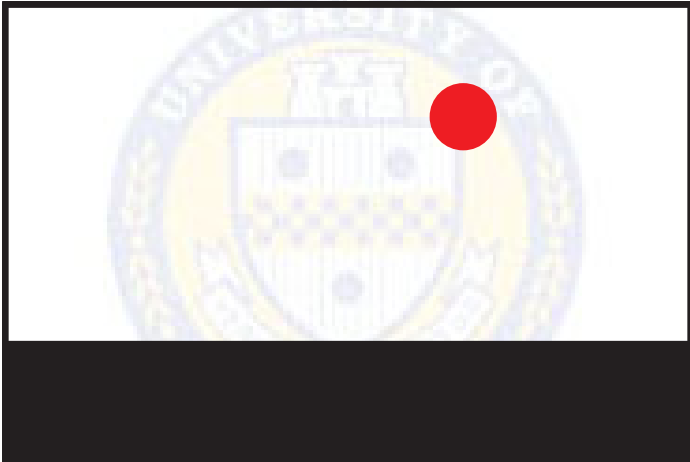


Figure: Simple Simulation: Trivial Example

Trivial Simulation

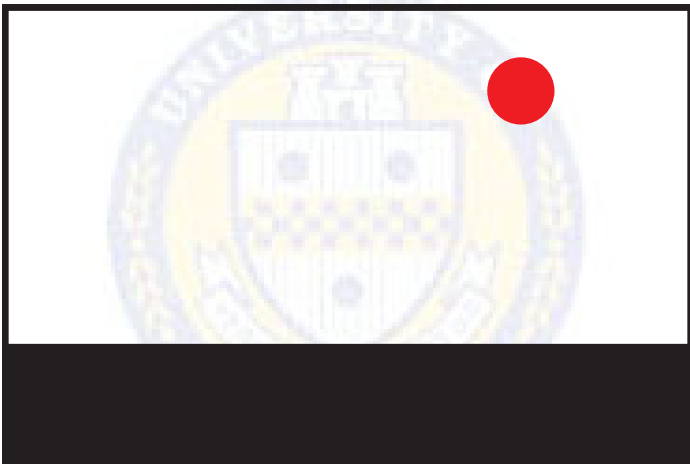


Figure: Simple Simulation: Trivial Example

Trivial Simulation

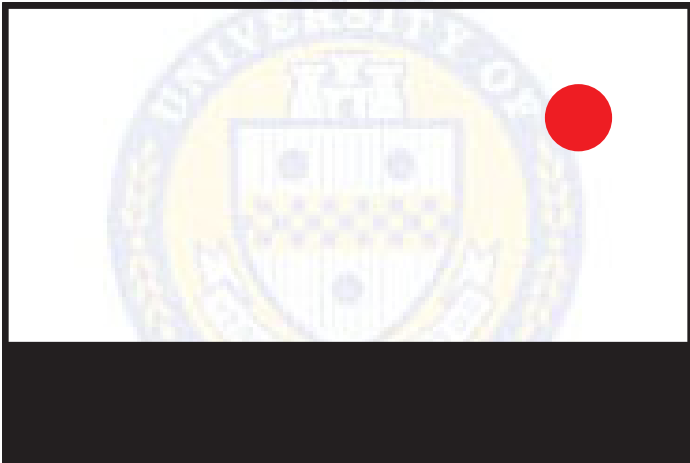


Figure: Simple Simulation: Trivial Example

Trivial Simulation

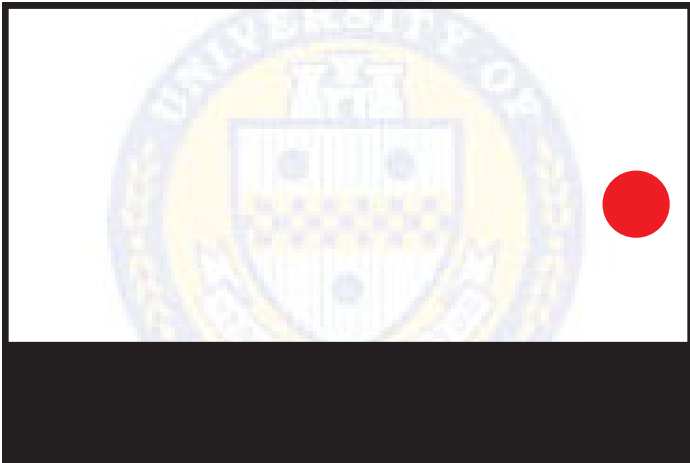


Figure: Simple Simulation: Trivial Example

Trivial Simulation

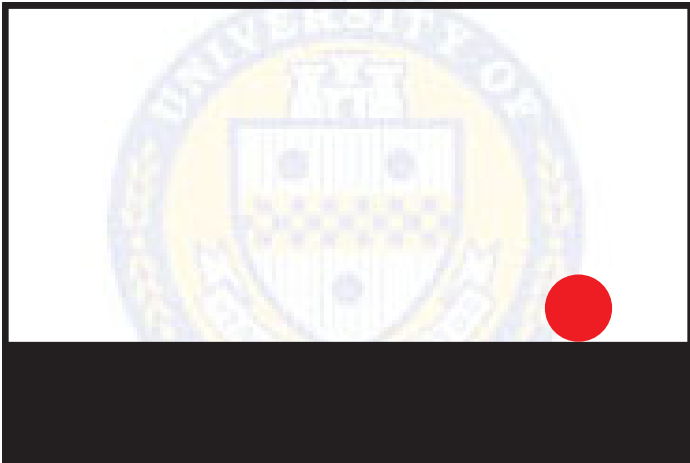


Figure: Simple Simulation: Trivial Example

Trivial Simulation

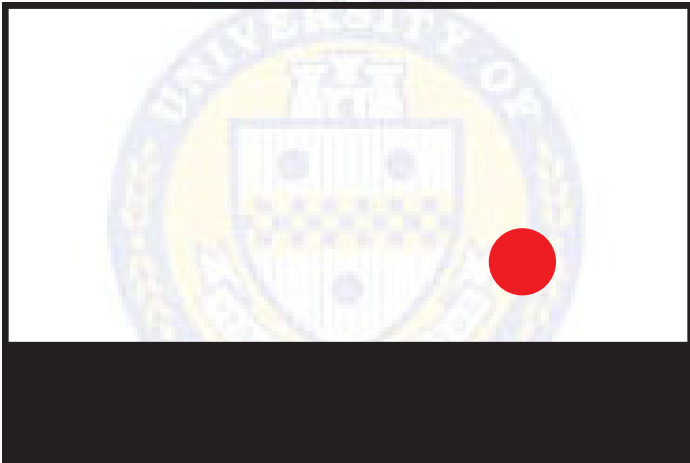


Figure: Simple Simulation: Trivial Example

Trivial Simulation

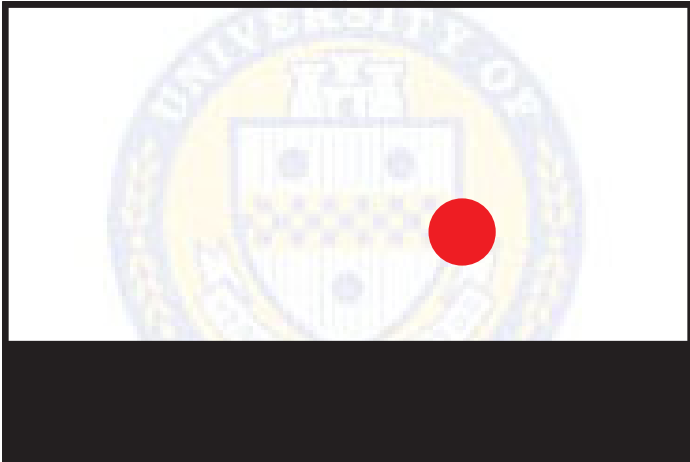


Figure: Simple Simulation: Trivial Example




Need to Define and Compute Depth of Penetration

- To avoid infinitely small time steps, say from collisions, we need to impose a minimum stepsize.
- For methods with minimum time step, interpenetration may be unavoidable, thus it needs to be quantified (to limit amount of interpenetration)
- Minimum Euclidean distance good for distance between objects, but not for penetration

Construction of a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics

- Ratio Metric
- Constraints and Model
- Algorithm
- Numerical Results
- Summary
- Future Projects

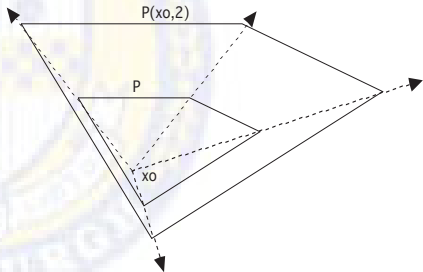

Polyhedra and Expansion/Contraction Maps

Definition

We define $CP(A, b, x_0)$ to be the convex polyhedron P defined by the linear inequalities $Ax \leq b$ with an interior point x_0 . We will often just write $P = CP(A, b, x_0)$.

Definition

Let $P = CP(A, b, x_0)$. Then for any nonnegative real number t , the expansion (contraction) of P with respect to the point x_0 is defined to be


$$P(x_0, t) = \{x \mid Ax \leq tb + (1 - t)Ax_0.\}$$

Minkowski Penetration Depth

Definition

Let $P_i = CP(A_i, b_i, x_i)$ be a convex polyhedron for $i = 1, 2$. The **Minkowski Penetration Depth (MPD)** between the two bodies P_1 and P_2 is defined formally as

$$PD(P_1, P_2) = \min\{\|d\| \mid \text{interior}(P_1 + d) \cap P_2 = \emptyset\}. \quad (1)$$

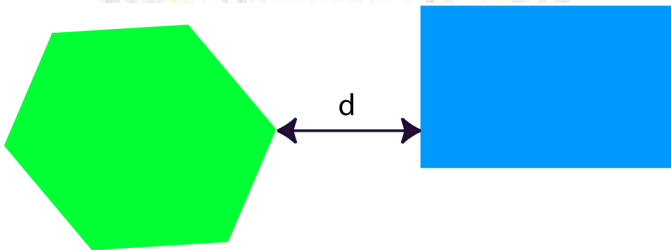

Ratio Metric Penetration Depth

Definition

Let $P_i = CP(A_i, b_i, x_i)$ be a convex polyhedron for $i = 1, 2$. Then the **Ratio Metric** between the two sets is given by

$$r(P_1, P_2) = \min\{t \mid P_1(x_1, t) \cap P_2(x_2, t) \neq \emptyset\}, \quad (2)$$

and the corresponding **Ratio Metric Penetration Depth (RPD)** is given by

$$\rho(P_1, P_2, r) = \frac{r(P_1, P_2) - 1}{r(P_1, P_2)}. \quad (3)$$

Expansion/Contraction Again

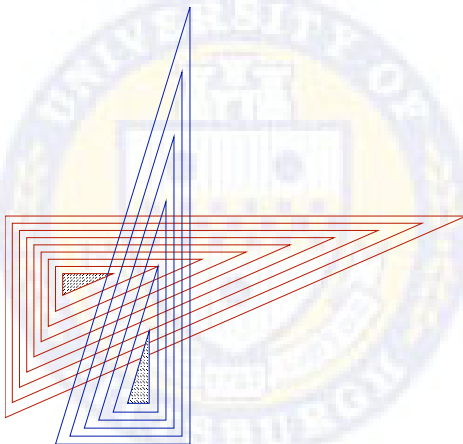


Figure: Visual representation of double expansion or contraction

Metric Equivalence Theorem

Theorem (Metric Equivalence)

Let $P_i = CP(A_i, b_i, x_i)$ be a convex polyhedron for $i = 1, 2$, s be the MPD between the two bodies, D be the distance between x_1 and x_2 , ϵ be the maximum allowable Minkowski penetration between any two bodies. Then the ratio metric penetration depth between the two sets satisfies the relationship

$$\frac{s}{D} \leq \rho(P_1, P_2, r) \leq \frac{s}{\epsilon}, \quad (4)$$

if P_1 and P_2 have disjoint interiors, and

$$-\frac{s}{\epsilon} \leq \rho(P_1, P_2, r) \leq -\frac{s}{D} \quad (5)$$

if the interiors of P_1 and P_2 are not disjoint.

Significance of the Metric Equivalence Theorem

- Let number of facets of two polyhedra be m_1 and m_2
 - Computing PD by using the Minkowski sums: $O(m_1^2 + m_2^2)$
 - Solving **linear programming** problem: $O(m_1 + m_2)$
- \therefore our metric provide us with a **simple way to detect collision and measure penetration** of two convex polyhedral bodies with **lower complexity** and is equivalent, for small penetration, to the classical measure
- \therefore for time step h , if the MPD is $O(h^2)$ then **so is** the RPD

Perfect Contact

Definition

In n -dimensional space, a **Basic Contact Unit (BCU)** occurs when

- two convex polyhedra are in perfect contact,
- the contact region attached to a BCU is a point, and
- exactly $n+1$ facets are involved at the contact.

The point where the contact occurs is called an **event point**, or more simply, an **event**.

- A CoF is always a BCU
- In 2D: CoF In 3D: CoF, (nonparallel) EoE

Basic Contact Unit




Figure:
Corner-on-Face




Figure: Edge-on-Edge




Figure: Face-on-Face

Theorem


The intersection of two convex polyhedra in perfect contact is the convex hull of the event points.

Differentiability

- Theorem: At any event E of perfect contact, then the **restrictions of $P_i(x_i, t)$ to E** are **infinitely differentiable** with respect to the translation vectors and rotation angles.
- Associate m^{th} event $E^{(m)}$ with component function $\hat{\Phi}^{(m)}$.
- Theorem: RPD is the **maximum** of component distance functions.

Construction of a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics

- Ratio Metric
- Constraints and Model
- Algorithm
- Numerical Results
- Summary
- Future Projects

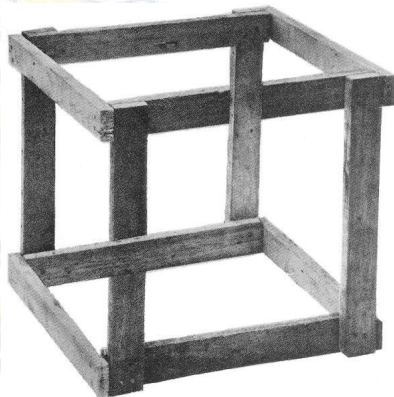

Noninterpenetration Constraints

- Model noninterpenetration constraints by continuous piecewise differentiable signed distance functions:

$$\phi^{(j)}(q) \geq 0, \quad j = 1, 2, \dots, p. \quad (6)$$

- We will use RPD to compute $\phi^{(j)}$




Figure: Noninterpenetration Constraint: Constraint not enforced

Joint Constraints

- Model joint constraints by sufficiently smooth $\Theta^{(i)}(q) = 0, i = 1, 2, \dots, n_J$
- Define $\nu^{(i)}(q) = \nabla_q \Theta^{(i)}(q), i = 1, 2, \dots, n_J$

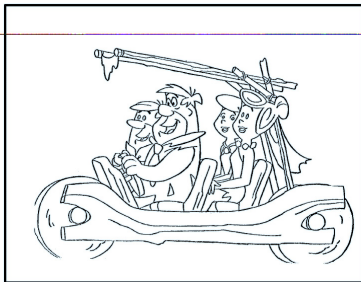


Figure: Joint Constraint: Fixed distance between wheels

Linear Complementarity Model

Euler discretization of the equations of motion:

$$M(q^{(l)}) (v^{(l+1)} - v^{(l)}) = h_l k(t^{(l)}, q^{(l)}, v^{(l)}) + \sum_{i=1}^{n_J} c_\nu^{(i)} \nu^{(i)}(q^{(l)}) + \sum_{m \in \mathcal{E}} \left(c_n^{(m)} n^{(m)}(q^{(l)}) + \sum_{i=1}^{M_C^{(m)}} \beta_i^{(m)} d_i^{(m)}(q^{(l)}) \right). \quad (7)$$

Modified linearization of geometrical and noninterpenetration constraints:

$$\begin{aligned} \gamma \Theta^{(i)}(q^{(l)}) + h_l \nu^{(i)T}(q^{(l)}) v^{(l+1)} &= 0, \quad i = 1, 2, \dots, n_J, \\ n^{(m)T}(q^{(l)}) v^{(l+1)} + \frac{\gamma}{h_l} \Phi^{(j)}(q^{(l)}) &\geq 0 \quad \perp \quad c_n^{(m)} \geq 0, \quad m \in \mathcal{E}. \end{aligned} \quad (8)$$

Friction Model

Friction model (usual classical pyramid approximation of friction cone, see Stewart & Trinkle 1995 or Anitescu & Hart 2004):

$$\begin{aligned} D^{(m)T}(q)v + \lambda^{(m)}e^{(m)} &\geq 0 \quad \perp \quad \beta^{(m)} \geq 0, \\ \mu c_n^{(m)} - e^{(m)T}\beta^{(m)} &\geq 0 \quad \perp \quad \lambda^{(m)} \geq 0. \end{aligned} \quad (9)$$




Figure: Approximation of Friction Cone

Mixed Complementarity and QP Formulation


$$\begin{array}{rcll}
 M^{(l)}v & -\tilde{n}\tilde{c}_n & -\tilde{D}\tilde{\beta} & = -q^{(l)} \\
 \tilde{\nu}^T v & & & = -\Upsilon \\
 \tilde{n}^T v & & -\tilde{\mu}\lambda & \geq -\Gamma - \Delta \quad \perp \quad c_n \geq 0 \\
 \tilde{D}^T v & & +\tilde{E}\lambda & \geq 0 \quad \perp \quad \tilde{\beta} \geq 0 \\
 & \tilde{\mu}c_n & -\tilde{E}^T\tilde{\beta} & \geq 0 \quad \perp \quad \lambda \geq 0
 \end{array} \quad (10)$$

Note (10) constitutes 1st-order optimality conditions of QP

$$\begin{array}{ll}
 \min_{v, \lambda} & \frac{1}{2}v^T M^{(l)}v + q^{(l)T}v \\
 \text{s.t.} & n^{(m)T}v - \mu^{(m)}\lambda^{(m)} \geq -\Gamma^{(m)} - \Delta^{(m)}, \quad m \in \mathcal{E} \\
 & D^{(m)T}v + \lambda^{(m)}e^{(m)} \geq 0, \quad m \in \mathcal{E} \\
 & \nu_i^T v = -\Upsilon_i, \quad 1 \leq i \leq n_J \\
 & \lambda^{(m)} \geq 0 \quad m \in \mathcal{E}
 \end{array} \quad (11)$$

Construction of a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics

- Ratio Metric
- Constraints and Model
- Algorithm
- Numerical Results
- Summary
- Future Projects

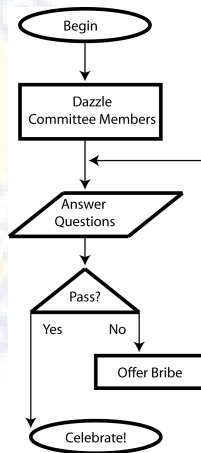

Assumption A1

A1: There exists $\epsilon_0 > 0$, $C_1^d > 0$, and $C_2^d > 0$ such that

- $\phi^{(j)}$ for $1 \leq j \leq n_B$ are piecewise continuous on their domains Ω_ϵ , with piecewise components $\hat{\phi}^{(m)}(q)$ which are twice continuously differentiable in their respective open domains with first and second derivatives uniformly bounded by $C_1^d > 0$ and $C_2^d > 0$, respectively, and
- $\Theta^{(i)}(q)$ for $i = 1, 2, \dots, m$ are twice continuously differentiable in Ω_ϵ with first and second derivatives uniformly bounded by $C_1^d > 0$ and $C_2^d > 0$, respectively.

Using Assumption A1

Lemma

If Assumption A1 holds, then $\phi^{(j)}$ for $1 \leq j \leq n_B$ is everywhere directionally differentiable. Moreover, the generalized gradient of $\phi^{(j)}$ is contained in the convex cover of the gradients of its component functions which are active at q evaluated at q .

Note: We use $\phi^{(j)^\circ}(q; v) = \limsup_{p \rightarrow q, t \downarrow 0} \frac{\phi^{(j)}(p + tv) - \phi^{(j)}(p)}{t}$

Lemma

If Assumption A1 holds, then for any j such that $1 \leq j \leq n_B$, then $\phi^{(j)}$ satisfies a Lipschitz condition.

Note: We use Lebourg's Mean Value Theorem in the proof

Assumptions D1 - D3

D1: The mass matrix is constant. That is, $M(q^{(l)}) = M^{(l)} = M$.

D2: The norm growth parameter is constant: $c(\cdot, \cdot, \cdot) \leq c_0$

D3: The external force is continuous and increases at most linearly with the pos. and vel., and unif. bdd in time:

$$k(t, v, q) = k_0(t, v, q) + f_c(v, q) + k_1(v) + k_2(q)$$

and there is some constant $c_K \geq 0$ such that

$$\begin{aligned} \|k_0(t, v, q)\| &\leq c_K \\ \|k_1(v)\| &\leq c_K \|v\| \\ \|k_2(q)\| &\leq c_K \|q\|. \end{aligned}$$

Also assume

$$v^T f_c(v, q) = 0 \quad \forall v, q.$$

Algorithm for Piecewise Smooth RMBD

Algorithm

Algorithm for piecewise smooth multibody dynamics

- Step 1:** Given $q^{(l)}$, $v^{(l)}$, and h_l , calculate the active set $\mathcal{A}(q^{(l)})$ and active events $\mathcal{E}(q^{(l)})$.
- Step 2:** Compute $v^{(l+1)}$, the velocity solution of our mixed LCP.
- Step 3:** Compute $q^{(l+1)} = q^{(l)} + h_l v^{(l+1)}$.
- Step 4:** IF finished, THEN stop ELSE set $l = l + 1$ and restart.

Proof that Algorithm works

Main Result

Theorem

Assume that our algorithm is applied over a time interval $[0, T]$, and

- The active set $\mathcal{A}(q)$ and active events $\mathcal{E}(q)$ are properly defined

- The time steps $h_l > 0$ satisfy

$$\sum_{l=0}^{N-1} h_l = T \quad \text{and} \quad \frac{h_{l-1}}{h_l} = c_h, \quad l = 1, 2, \dots, N-1$$

- The system satisfies Assumptions (A1) and (D1) - (D3)

- The system is initially feasible. That is, $l(q^{(0)}) = 0$

Then, there exist $H > 0$, $V > 0$, and $C_c > 0$ such that


$$\|v^{(l)}\| \leq V \quad \text{and} \quad l(q^{(l)}) \leq C_c \|v^{(l)}\|^2 h_{l-1}^2, \quad \forall l, 1 \leq l \leq N$$

Consequences of the Theorem

- Algorithm **achieves constraint stabilization** because the infeasibility is bounded above by the size of the solution. In particular, $v^{(l+1)} = 0 \Rightarrow l(q^{(l+1)}) = 0$
- Linear $O(h)$ method yields quadratic $O(h^2)$ **infeasibility**
- **Velocity remains bounded**
- **No need to change the step size** to control infeasibility
- Solve **one linear complementarity problem** per step

Construction of a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics

- Ratio Metric
- Constraints and Model
- Algorithm
- Numerical Results
- Summary
- Future Projects






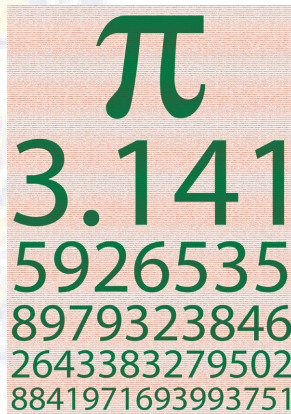



π
3.141
5926535
8979323846
2643383279502
8841971693993751



Balance2


Six successive frames from Balance2



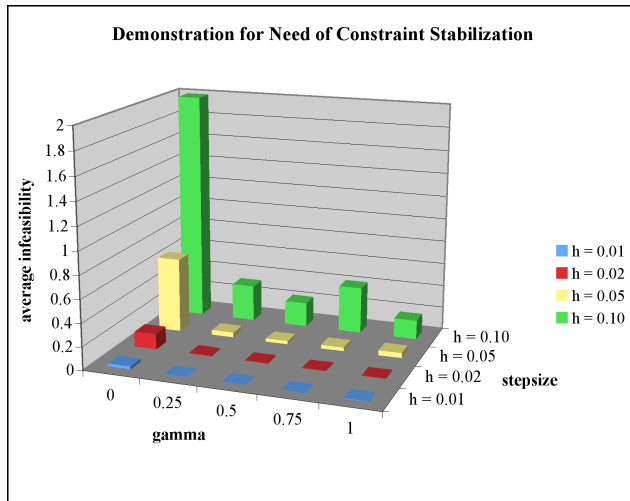

Smaller stepsize \Rightarrow smaller average infeasibility
 Constraint stabilization \Rightarrow smaller average infeasibility





Balance2

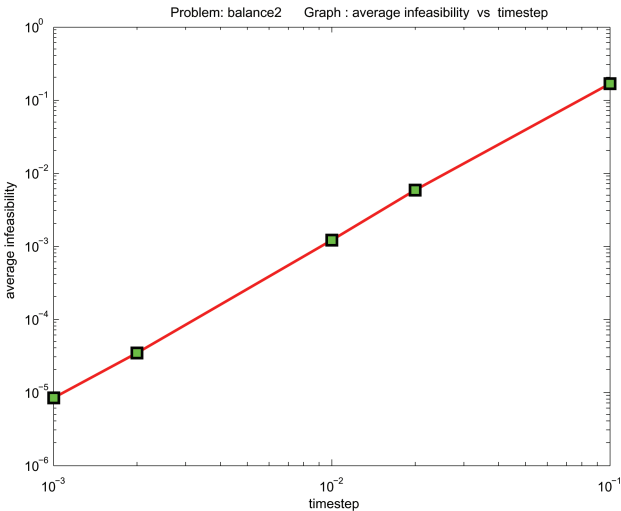

Average infeasibility shows quadratic $O(h^2)$ nature

Pyramid1

Six successive frames from Pyramid1

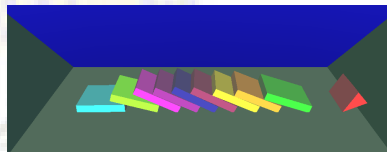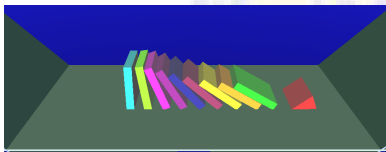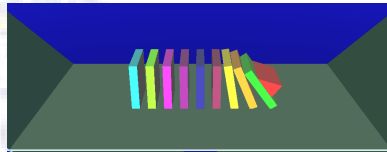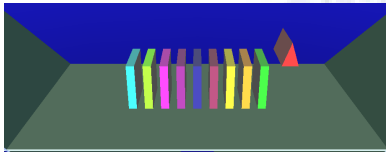

Construction of a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics

- Ratio Metric
- Constraints and Model
- Algorithm
- Numerical Results
- **Summary**
- Future Projects



Accomplishments

- **Successfully developed** a computationally efficient signed distance function, Ratio Metric
- **Successfully shown** equivalence of RPM to MPD
- **Successfully developed and analyzed** algorithm that achieves constraint stabilization solving one LCP per step
- **Successfully calculated** generalized gradients and showed that infeasibility at step l is upper bounded by $O(\|h_{l-1}\|^2 \|v^{(l)}\|^2)$
- **Successfully implemented** this algorithm for several problems with good results

Construction of a constraint-stabilized time-stepping approach for piecewise smooth multibody dynamics

- Ratio Metric
- Constraints and Model
- Algorithm
- Numerical Results
- Summary
- Future Projects



Goals

- **Successfully model** other interesting problems.
- **Successfully model** problem with joint constraints.
- **Complete proof** for piecewise defined joint constraints.
- **Successfully model** problem with piecewise joint constraints.

Thank You!

- Auburn University
- Clemson University
- North Carolina A T & T
- University of Pittsburgh
- University of South Carolina
- Virginia Tech
 - SIAM Student Chapter at Virginia Tech
 - Virginia Tech Mathematics Department
 - Interdisciplinary Center for Applied Mathematics (ICAM)

